

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199710082 B2
(10) Patent No. 730753

(54) Title
Rubber composition for tire casings based on silicas containing a reinforcing additive based on a functionalized polyorganosiloxane and on an organosilane compound

(51)⁶ International Patent Classification(s)
C08K 005/54 C08L 009/00
B60C 001/00 C08L 021/00

(21) Application No: 199710082 (22) Application Date: 1997 .01 .09

(30) Priority Data

(31) Number (32) Date (33) Country
9600441 1996 .01 .11 FR

(43) Publication Date : 1997 .07 .17
(43) Publication Journal Date : 1997 .07 .17
(44) Accepted Journal Date : 2001 .03 .15

(71) Applicant(s)
Compagnie Generale Des Etablissements Michelin - Michelin and Cie

(72) Inventor(s)
Yves Bomal; Olivier Durel

(74) Agent/Attorney
WATERMARK PATENT and TRADEMARK ATTORNEYS, Locked Bag 5, HAWTHORN VIC 3122

(56) Related Art
US 5278204
US 4714733

CONFIDENTIAL

ABSTRACT

Rubber composition intended for the manufacture of tire casings which have improved hysteretic properties and scorch safety, based on at least one elastomer and silica by way of reinforcing filler enclosing a reinforcing additive consisting of the mixture and/or the product of in situ reaction of at least one functionalized polyorganosiloxane compound containing, per molecule, at least one functional siloxy unit capable of bonding chemically and/or physically to the surface hydroxyl sites of the silica particles and at least one functionalized organosilane compound containing, per molecule, at least one functional group capable of bonding chemically and/or physically to the polyorganosiloxane and/or the hydroxyl sites of the silica particles and at least one other functional group capable of bonding chemically and/or physically to the polymer chains.

AUSTRALIA

Patents Act 1990

**ORIGINAL
COMPLETE SPECIFICATION
STANDARD PATENT**

Application Number:

Lodged:

Invention Title:

RUBBER COMPOSITION FOR TIRE CASINGS BASED ON SILICAS
CONTAINING A REINFORCING ADDITIVE BASED ON A
FUNCTIONALIZED POLYORGANOSILOXANE AND ON AN
ORGANOSILANE COMPOUND

The following statement is a full description of this invention, including the
best method of performing it known to us :-

SPECIFICATION

BACKGROUND OF THE INVENTION

The present invention relates to new rubber compositions intended for the manufacture of tire casings based on precipitated silicas containing a reinforcing additive based on a functionalized polyorganosiloxane and an
5 organosilane compound.

Since the economies of fuel and the need to protect the environment have become a priority, it is desirable to produce polymers which have good mechanical
10 properties and a hysteresis which is as low as possible in order to enable them to be used in the form of rubbery compositions which can be employed for the manufacture of

various semifinished products forming part of the constitution of tire casings, such as, for example, underlinings, calendering or sidewall rubbers or treads and to obtain tires with improved properties, which have in particular a reduced rolling resistance.

Many solutions have been proposed to meet such an objective, consisting especially in modifying, among others, the nature of the diene polymers and copolymers at the end of polymerization by means of coupling or starring or functionalizing agents. All these solutions have concentrated essentially on the use of the modified polymers with carbon black as reinforcing filler with the aim of obtaining a good interaction between the modified polymer and the carbon black. It is known, in general, that in order to obtain optimum reinforcing properties which are imparted by a filler it is appropriate that the latter should be present in the elastomer matrix in a final form which is both as finely divided as possible and distributed as homogeneously as possible. However, such conditions can be achieved only insofar as, on the one hand, the filler has a very good capacity for being incorporated into the matrix during the mixing with the elastomer and for being deaggregated or deagglomerated and for being dispersed homogeneously in the elastomer. The use of white reinforcing fillers, and especially of silica, has been found

inappropriate because of the low level of some properties of such compositions and consequently of some properties of the tires utilizing these compositions.

In addition, for reasons of mutual affinities,
5 silica particles have an unfortunate tendency, in the elastomer matrix, to agglomerate together. These silica/silica interactions have the detrimental consequence of limiting the reinforcing properties to a level which is appreciably lower than that which it would be theoretically
10 possible to attain if all the silica/elastomer interactions capable of being created during the mixing operation were actually obtained.

What is more, the use of silica gives rise to difficulties in processing which are due to the silica/silica
15 interactions which tend, in the raw state (before curing), to increase the consistency of the rubbery compositions and, in any event, to make the processing more difficult than the processing of carbon black.

Finally, the interactions between the silica and
20 the crosslinking system, when the latter is sulfur-based, and the accelerators usually employed in the case of sulfur reduce the rate and efficiency of crosslinking.

In the case of silica-reinforced compositions interest has been revived with the publication of European
25 Patent Application EP-A-0 501 227, which discloses a sulfur-

2
vulcanizable rubber composition obtained by thermomechanical
working of a copolymer of conjugated diene and of an
aromatic vinyl compound, prepared by polymerization in
solution with 30 to 150 parts by weight, per 100 parts by
5 weight of elastomer, of a particular precipitated silica.
The use of such a silica has undoubtedly reduced the
difficulties in processing the mixtures containing it,
predominantly or otherwise, as reinforcing filler, but the
processing of such rubbery compositions nevertheless remains
10 more difficult than the processing of carbon black.

It is known to a person skilled in the art that a
coupling or bonding agent which reacts with silica must be
employed to create good interactions between the surface of
the silica and the elastomer while promoting the dispersion
15 of the silica, and the compositions described in European
Patent Application EP-A-0 501 227 are also subject to this
need.

One objective of a person skilled in the art
consists in improving the processing of the diene rubber
20 compositions including silica as reinforcing filler which
are intended for the manufacture of tire casings and, on the
other hand, to reduce the quantity of coupling and/or
reinforcing agent needed, without degrading the properties
of such compositions.

25 Thus, in Patent US-A 3,350,345 it has been

proposed to employ, in rubber compositions including silica, a hydrolyzable silane and in particular a mercaptosilane as elastomer/silica coupling agent. In Patent Application FR-A-2,094,859 it was subsequently proposed to employ rubber compositions including silica and a mercaptosilane as coupling agent for the manufacture of tire treads, because of the improved properties exhibited by such compositions. It was rapidly demonstrated and known to a person skilled in the art that mercaptosilanes and in particular γ -mercaptopropyltrimethoxysilane and γ -mercaptopropyltriethoxysilane were capable of providing the best silica/elastomer coupling properties, but that the industrial use of these coupling agents was not possible because of the high reactivity of the SH functional groups resulting very rapidly, during the preparation of a composition in an internal mixer, in premature vulcanizations, also called "scorching", with very high Mooney plasticities and, all things considered, in compositions which were virtually impossible to work and to process on industrial scale.

To illustrate this impossibility of employing such coupling agents and the compositions containing them on industrial scale, Patent Application FR-A-2,206,330 and Patent US-A-4,002,594 may be mentioned.

To overcome this disadvantage, in Patent

Application FR-A-2,206,330 it has been proposed to employ as

coupling agent organosilane polysulfides, including bis-
3-triethoxysilylpropyl tetrasulfide, which are found to give
the best compromise, in the case of silica-filled
vulcanizates, in terms of scorch safety, ease of processing
5 and reinforcing power. However, this coupling agent is very
costly and must be employed in a relatively large quantity,
of the order of 2 to 3 times greater than the quantity of
γ-mercaptopropyltrimethoxysilane needed to obtain equivalent
coupling property levels.

10 Consequently, it therefore appears desirable from
an economical viewpoint to have the ability to develop on
industrial scale silica-reinforced rubber compositions
including low contents of reinforcing additives which are as
effective as mercaptosilanes, but while avoiding premature
15 scorching and problems in processing which are related to an
excessive viscosity of the compositions.

An attempt in this direction was described in
Patent US-A-4,474,908 which discloses the use of the mixture
of a mercaptosilane and an alkoxysilane as reinforcing
20 additive for a rubber composition.

However, this route is not a satisfactory remedy
to the problem of scorching and of processing and, in
addition, it is costly.

Another attempt has been described in Japanese
25 Patent Application JP-A-06,248,116, which discloses rubber

compositions intended for the manufacture of tire casings including, as reinforcing filler, a blend of carbon black and of silica surface treated with unfunctionalized silicone oils (generally and usually called PDMS by a person skilled in the art), as well as a silane as coupling agent. This route does not enable the problem faced by a person skilled in the art to be solved, whether the filler consists of a black/silica dilution or silica alone. In fact, the solution described in this application requires the pretreatment of the silica with the silicone oil at a high temperature (approximately 250°C) and for an extended period (approximately 1 hour) before it is incorporated into the elastomer and into the coupling agent.

The present invention remedies the problem presented by the use, in rubber compositions based on at least one elastomer and intended for the manufacture of a tire casing which has improved hysteretic properties and which includes silica as reinforcing filler, of a reinforcing additive consisting of the mixture and/or the product of in situ reaction of at least one functionalized polyorganosiloxane compound containing, per molecule, at least one functional siloxy unit capable of bonding chemically and/or physically with the surface hydroxyl sites of the silica particles and at least one functionalized organosilane compound containing, per molecule, at least one

functional group capable of bonding chemically and/or physically with the polyorganosiloxane and/or the hydroxyl sites of the silica particles and at least one other functional group capable of bonding chemically and/or physically to the chains of elastomer(s).

- 5 The invention provides a tire having improved hysteretic properties comprising (I) textile or metal reinforcements and (II) a rubber composition, the rubber composition comprising a mixture of at least: (A) one diene elastomer, (B) silica as a reinforcing filler; and (C) a reinforcing additive consisting essentially of a mixture and/or the product of in situ reaction of (I) at least one functionalized
- 10 polyorganosiloxane compound containing, per molecule, at least one functional siloxy unit capable of bonding chemically and/or physically with the surface hydroxyl sites of said silica particles and (ii) at least one functionalized organosilane compound containing, per molecule, at least one functional group capable of bonding chemically and/or physically with said polyorganosiloxane and/or the
- 15 hydroxyl sites of said silica particles and at least one other functional group capable of bonding chemically and/or physically to the chains of the diene elastomer.

- Another object of the invention is the use, for the manufacture of tire casings, of a rubber composition based on at least one elastomer, including silica as reinforcing filler and a reinforcing additive consisting of the mixture and/or the
- 20 product of in situ reaction of at least one functionalized polyorganosiloxane compound containing, per molecule, at least one functional siloxy unit capable of bonding chemically and/or physically with the surface hydroxyl sites of the silica particles and at least one functionalized organosilane compound containing, per molecule, at least one functional group capable of bonding chemically and/or
- 25 physically with the polyorganosiloxane and/or the hydroxyl sites of the silica particles and at least one other functional group capable of bonding chemically and/or physically to the chains of elastomer(s).

- Another subject-matter of the present invention is semifinished constituents which can be employed in the manufacture of tires, especially of treads, and tires
- 30 which have an improved rolling resistance, obtained by the use of a rubber composition according to the invention embodying silica as reinforcing filler.



Another subject-matter of the present invention is a process for improving the hysteretic properties of silica-reinforced rubber compositions intended for the manufacture of tire casings, and of semifinished products for tire casings.

Another subject-matter of the present invention is a tire casing including a
5 rubber composition comprising at least one elastomer, silica as a reinforcing filler and a covering additive, wherein the covering additive consists of at least one functionalized polyorganosiloxane compound containing, per molecule, at least one functional siloxy unit capable of bonding chemically and/or physically with the surface hydroxyl sites present on the silica particles.

10 The invention provides a tire casing including a rubber composition comprising at least one diene elastomer, silica as reinforcing filler, a covering additive, wherein the covering additive consists of at least one functionalized polyorganosiloxane compound containing, per molecule, at least one functional siloxy unit capable of bonding chemically and/or physically with the surface
15 hydroxyl sites present on the silica particles.

Finally, another subject-matter of the present invention is a process making it possible to delay substantially the scorching of diene rubber compositions intended for the manufacture of tire casings and of semifinished products for tire casings during the stages of preparation and processing of said compositions.

20 The reinforcing additive employed in the rubber compositions in accordance with the invention includes, on the one hand, one or a number of functionalized polyorganosiloxane compound(s) containing, per molecule, one




or a number of functional siloxy unit(s) capable of bonding chemically and/or physically with the surface hydroxyl sites of the silica particles and, on the other hand, one or a number of functionalized organosilane compound(s).

- 5 Particularly suitable among the functionalized polyorganosiloxanes are those in which the siloxy units contain a hydrolyzable functional substituent or one or a number of H or OH residue(s) whose reactivity towards silica differs from the other recurring functional substituent(s)
- 10 of the polyorganosiloxane.

Any compound corresponding to any one of the following compounds may be chosen as suitable functionalized polyorganosiloxane compounds for the present invention:

(A) - the compounds containing, per molecule,

- 15 - α - on the one hand, at least one functional siloxy unit of formula:



in which:

$$a = 0, 1 \text{ or } 2,$$


- 20 R is a monovalent hydrocarbon radical chosen from

linear or branched alkyls containing from 1 to 6 carbon atoms particular methyl, ethyl, propyl and butyl and/or from aryls and in particular phenyl, methyl being more particularly preferred, the radicals R being identical or different when

5 a = 2,

Y is a linear or branched alkoxy radical chosen, preferably, from C₁-C₁₁, and in particular C₁-C₆, alkoxys, methoxy, ethoxy and (iso)propoxy being more particularly adopted,

10 - β - and optionally, on the other hand, at least one functional siloxy unit of formula:



in which:

b = 0, 1 or 2,

15 R corresponds to the same definition as that given above for the substituent R of unit (I) and may be identical with or different from the latter,

W is a monovalent hydrocarbon radical containing from 2 to 30 carbon atoms and optionally S and/or O atoms
20 and constituting a functional residue bonded to silicon by


an Si-C bond, this residue being chosen from the following groups:

(i) a linear or branched alkyl group containing at least 7 carbon atoms,

5 (ii) a linear or branched C₇-C₂₀ alkenyl group containing one or more double bond(s) in and/or at the end(s) of the chain(s) said double bonds being preferably conjugated and/or associated with at least one activating group in the α position,

10 (iii) a saturated or unsaturated aliphatic mono- or polycyclic group containing 5 to 20 carbon atoms and one or more ethylenic double bond(s) in the ring(s), optionally bonded to silicon through the intermediacy of a C₂-C₁₀ linear or branched alkylene radical,

15 - γ - and optionally, on the other hand, at least one siloxy unit of the following formula:




in which:

$$c = 0, 1, 2 \text{ or } 3, \quad d = 1 \text{ and } c + d \leq 3$$

20 the substituents R being as defined above in units (I) and (II).

According to a terminology which is conventional in silicones, the units (I) and (II) may be M, D and T units; in the latter case the polyorganosiloxanes are in the form of linear chains which are mutually crosslinked.

5 (B) - The compounds of formula (IV):

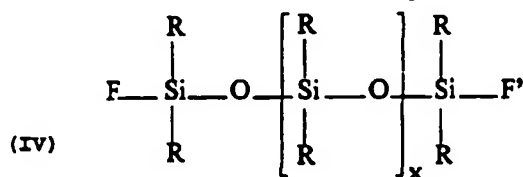

in which:

R is a hydrocarbon radical corresponding to the same definition as that of R given above as legend in
 10 formula (I), or a linear or branched C₁-C₂₀ alkenyl group containing one or more double bonds. The various exemplars of R may be identical with or different from each other,

x = 0 to 500, preferably x = 0 to 50,

F and F' are monovalent radicals chosen from
 15 hydrogen, the halogens and preferably chlorine, those corresponding to the definition of R, and/or hydroxyl,

alkoxy, enoxy, acyloxy, more particularly acetoxy, oxime and amine functional groups; the hydroxyl, methoxy and ethoxy functional groups being more particularly preferred. F and F' may be different or identical, but in the latter case it must not be a question of the radical R, and constitute the functional substituents of the functional siloxy units.

(C) - Polyorganosiloxane resins containing monovalent radicals and/or reactive functional groups F and F', these symbols having the same definition as that given above as legend in formula (IV).

The polyorganosiloxanes (A) are notable in that the functional substituent Y is hydrolyzable and allows grafting on silica, whereas the functional substituent W which is optionally present is hydrolyzable with greater difficulty than the functional substituent Y and is capable of expressing various properties as a function of its chemical nature.

The substituent W of the unit of formula (II) is preferably chosen from the following radicals:

- a radical (i) containing from 10 to 30 carbon atoms and chosen preferably from the following alkyl radicals: dodecyl, undecyl, tridecyl;
- a C_6-C_{10} radical (ii), containing a double bond and preferably another one, conjugated or unconjugated with

the first one;

- a saturated or unsaturated aliphatic monocyclic or polycyclic group (iii) containing 5 to 20 carbon atoms, more particularly cyclohexyl, cyclohexenyl or bicyclic rings originating from norbornene or from dicyclopentadiene, optionally linked to silicon through the intermediacy of a C₂-C₂ linear or branched alkylene radical.

It is appropriate to emphasize that when more than one exemplar of a unit of a given type (I, II or III) is present in the polyorganosiloxane, the various exemplars may be identical with or different from each other. It is even possible advantageously to use this plurality to advantage. For example, functionalized polyorganosiloxanes simultaneously carrying ethoxy and methoxy functional groups as functional groups Y will enable a person skilled in the art to modulate the rate of reaction with the silica as a function of the respective percentages of the two functional groups.


Bearing in mind the values which can be taken by the indices a to d attributed to the substituents in the units (I), (II) and (III), it must be understood that the polyorganosiloxanes may exhibit a linear and/or branched and/or cyclic structure.

The preferred radicals R are: methyl, ethyl, n-propyl, isopropyl or n-butyl. Still more preferably, at

least 80 % of the number of the radicals R are methyls.

The preferred alkoxy radicals Y are ethoxys.

As preferred polyorganosiloxanes with which the invention is concerned there are mentioned first of all
 5 those formed by random, sequential or block linear copolymers of the following average formula (V):

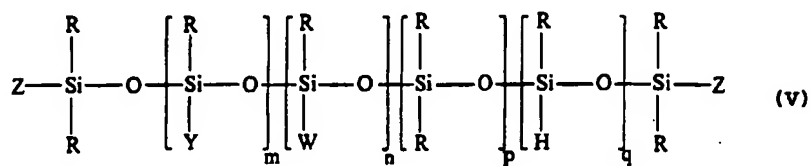

in which:

the symbols Y, W and R are as defined above,

the symbol Z is a monovalent radical chosen from
the radicals formed by hydrogen and from those corresponding
5 to the definitions of R, Y and W,

the sum $m + n + p + q \geq 3$, preferably between 3
and 100; the illustrated case in which $p = q = 0$, $m \geq 1$ and
 $n \leq 50$ being more particularly preferred,

$0 \leq m \leq 100$, preferably $1 \leq m \leq 50$

10 $0 \leq n \leq 100$, preferably $1 \leq n \leq 50$

$0 \leq p \leq 20$, preferably $0 \leq p \leq 10$

$0 \leq q \leq 40$, preferably $0 \leq q \leq 10$,


with the conditions according to which:

- if $m = 0$, at least one of the substituents Z
15 corresponds to a radical corresponding to the
definition characterizing Y
- if $m = n = 0$ and $p + q \geq 1$, then at least one of the
substituents Z corresponds to a radical corresponding
to the definition characterizing Y.


20 Among the polyorganosiloxanes of formula (V) which

are more particularly preferred there may be mentioned those in the case of which $p = q = 1$ and $0.5 \leq m/n \leq 5$, preferably $1 \leq m/n \leq 3$.


The compounds corresponding to the following
5 formulae may be mentioned by way of examples of linear functionalized polyorganosiloxanes:

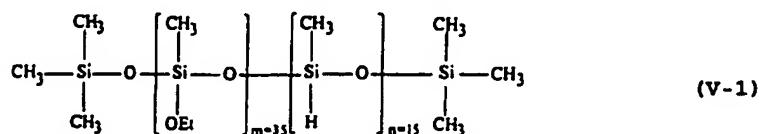


with, on average, $m: 35$ and $n: 15$

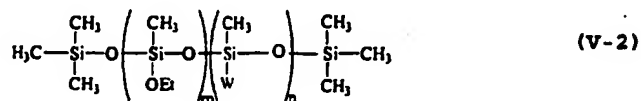


10 with, on average, $m: 29$ and $n: 15$ and W corresponding to:
- $(\text{CH}_2)_7-\text{CH}_3$

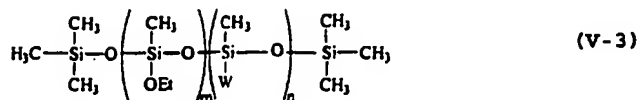


with, on average, m: 23 and n: 8.5 and W corresponding to: -
 $-(CH_2)_4-CH=CH_2$

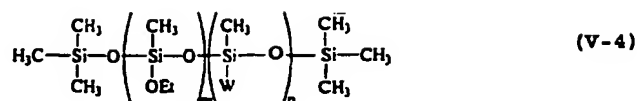

with, on average, m: 35 and n: 16 and W corresponding to:



5 An alternative to the linear structure of the
 polymers of formula (V) as defined above relates to
 polyorganosiloxanes consisting of cyclic copolymers of the
 following average formula:

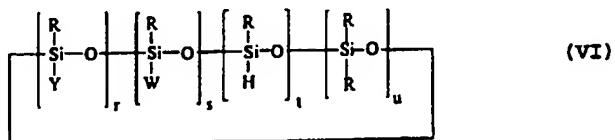

10 in which:

Y, W and R are as defined above, and with r, s, t
 and u representing positive whole or decimal numbers,

the sum $r + s + t + u \geq 3$, preferably between 4 and 8, the case illustrated in which $t = u = 0$ being more particularly preferred,

- 5 - $1 \leq r \leq 8$, preferably $1 \leq r \leq 4$
 - $1 \leq s \leq 8$, preferably $1 \leq s \leq 4$
 - $0 \leq t \leq 8$, preferably $0 \leq t \leq 4$
 - $0 \leq u \leq 8$, preferably $0 \leq u \leq 4$.

10 The polyorganosiloxanes preferably consist of products corresponding to those in the case of which $R = CH_3$ and $p = u = 0$ and $q = t = 0$ in the formulae (V) and (VI) defined above.

 It is obvious that, as already indicated above, in these formulae (V) and (VI) the radicals W may be of identical or different nature when $n > 1$ and $s > 1$.

15 A number of polyorganosiloxanes of the type defined above may, of course, be employed within the scope of the present invention.

 These polyorganosiloxanes and especially the multifunctional polyorganosiloxanes are obtained according
20 to a process consisting, on the one hand, in reacting a starting polyorganosiloxane containing units of formula (II) as defined above, in which W denotes hydrogen, with at least one alcohol from which the functionality Y of the unit (I) is derived, and used at the same time as a reactant and as
25 reaction solvent, in the presence of a catalyst in which at

least one of the active elements is chosen from the transition metals, according to a dehydrocondensation mechanism (1st stage), and, on the other hand, in using the addition of the polyorganosiloxane converted by dehydrocondensation to at least one olefinic compound from which the functionality W of the unit (II) is derived according to a hydrosilylation mechanism (2nd stage), in the presence of a catalyst and preferably at a temperature of between 5 and 100°C and still more preferably between 5 and 70°C.

As a matter of priority, the alcohols used are monohydroxy linear or branched alkanols (primary, secondary or tertiary, preferably primary) which are preferably chosen from the following list: methanol, ethanol, (iso)propanol and (n) butanol, ethanol being preferred.

With regard to the catalyst, this is advantageously chosen from those containing at least one of the following elements: Pt, Rh, Ru, Pd and Ni and their combinations, this catalyst being optionally coupled to a support which is inert or otherwise.

According to a preferred arrangement of the invention, the catalyst is taken from the class of the platinum catalysts which are conventionally employed for carrying out hydrosilylation reactions. These platinum catalysts are extensively described in the literature. It is possible, in particular, to mention the complexes of

platinum and of an organic product which are described in US Patents US-A-3 159 601, US-A-3 159 602, US-A-3 220 972 and European Patents EP-A-57 459, EP-188 978, EP-A-190 530 and the complexes of platinum and of vinylorganopolysiloxane
5 described in US Patents US-A-3 419 593, US-A-3 715 334, US-A-3 377 432 and US-A-3 814 730. The Karstedt catalyst is an example of platinum catalyst which is appropriate for the process according to the invention.. (Karstedt patent US-A-3 775 452).

10 Nickel-based catalysts like, for example, Raney nickel, constitute a possible alternative to the platinum catalysts.

Where the reaction conditions are concerned, the dehydrocondensation can be carried out over a wide range of
15 temperature extending, for example, from 0 to 200°C, but it is clear that it is preferred that it should be performed at a temperature of between 10 and 50°C, preferably between 18 and 35°C.

The second stage of the process according to the
20 invention consists of a reaction of addition of the hydrogenated intermediate polyorganosiloxane produced by dehydrocondensation to at least one olefinic compound carrying at least one π bond.

This involves a hydrosilylation mechanism, in the
25 presence of a catalyst and, preferably, at a temperature

between 5 and 100°C and still more preferably between 5 and 70°C.

According to a preferred methodology the hydrosilylation is initiated by adding the olefinic compound
5 from which the radical W as defined above is derived to the intermediate alkoxyated polyorganosiloxane, once the dehydrocondensation is finished. In practice this addition can take place when the release of hydrogen has ceased.

The reactive alkene may be formed by a mixture of
10 products comprising a single or a number of precursor species of radicals W, which determine the multifunctionality of the final polyorganosiloxane. In the case where a number of species W are provided, the alkene corresponding to the second functionality is preferably
15 allowed to react first of all and then, once the latter has reacted completely, the alkene corresponding to the third functionality is incorporated, and so on.


Instead of being incorporated into the reaction mixture after dehydrocondensation, the olefinic compound
20 which is a precursor of W may be used before this first stage of the process begins, or else during it.

The olefinic compounds used can be easily deduced from the definition of W given above. The choice with regard to this radical is determined by the intended applications
25 (one or a number of different functionalities).

The hydrosilylation stage may advantageously take place at ambient temperature and in bulk or in solution, for example in the alcohol which has been used as solvent for the dehydrocondensation reaction.

5 When the reactions are finished, the raw polyorganosiloxanes which are obtained may be purified particularly by being passed through a column filled with an ion exchange resin and/or by simple devolatilization of the excess reactants introduced and optionally of the solvent
10 used, by heating which is performed between 100 and 180°C at reduced pressure.

The starting polyorganosiloxane is advantageously selected from those corresponding to the following formula:

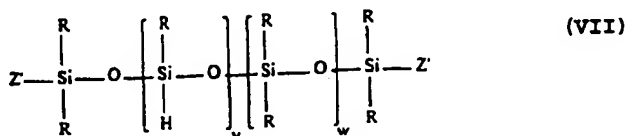

15 in which:


the symbols R are identical or different and are as defined above as legend to the formula of units (I) and (II),

the symbols Z' are identical or different and correspond to R or to hydrogen,

v is an integer or a decimal number ≥ 0 which can be defined as follows: $v = n + m + p$; n , m and p corresponding to the definitions given above as legend to the formula of unit (V), with the condition according to which if $v = 0$ then $w \geq 1$ and both radicals Z' correspond to hydrogen,

w corresponds to the same definition as that of p given above as legend to the formula of unit (V).

The starting polyorganosiloxanes used, for example, for the preparation of the cyclic functionalized products are those selected from those corresponding to the following average formula:

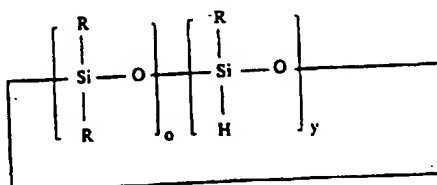

(VIII)

in which:

the symbols R are identical or different and are as defined above, as legend to the formula of units (I) and (II),


5 o corresponds to the same definition as that of u given above, as legend to the formula of unit (VI),

y is an integer or a decimal number ≥ 0 , which can be defined as follows: $y = r + s + t$ and $y + u \geq 3$; r, s, t and u corresponding to the definitions given above as legend to the formula of unit (VI).

The following are preferably suitable as examples of compounds (B):

The silanol-ended polydimethylsiloxanes such as the following commercial products manufactured by Huls America Inc. which appear in the 1994 catalog of the company
15 ABCR - Roth - Sochiel Sarl under the reference:


PS 340

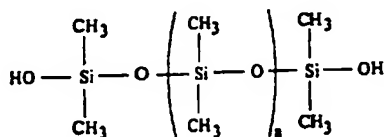

with a denoting a positive integer, to give a

weight-average mass between 400 and 700.


PS 341

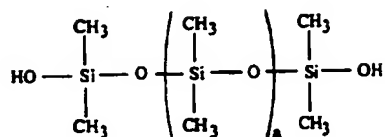

with a denoting a positive integer, to give a weight-average mass of 4200.

5 The polydimethylsiloxanes ending in ethoxy groups, such as the products manufactured by Huls America Inc. and which appear in the 1994 catalog of the company ABCR - Roth-Sochiel Sarl under the reference:

PS 395

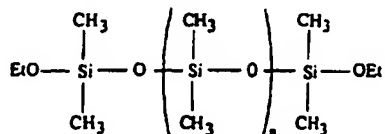


10 with a denoting a positive integer, to give a weight-average mass between 700 and 1200.

The compounds (C) are polyorganosiloxane resins consisting of small macromolecular networks of one or more ring(s) as a result of the presence of M, D, T or Q units in

the molecule, according to a conventional silicone terminology, and containing monovalent radicals and/or reactive functional groups.

By way of example of such resins there may be mentioned the compounds corresponding to the formula:

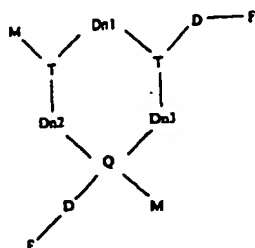

(IX)

in which:

n denotes the number of D units in each chain link of the ring: $0 \leq n_1, n_2, n_3 \leq 20$

10 F and F' are monovalent radicals chosen from hydrogen, chlorine, those corresponding to the definition of R, and/or hydroxyl, alkoxy, enoxy, acyloxy, more particularly acetoxy, oxime and amine functional groups; the hydroxyl, methoxy and ethoxy functional groups being more

particularly preferred; F and F' may be different or identical, but in the latter case it must not be the radical R.

It is obvious that the number of chain links of each ring may be greater than 3, just as the number of units F may be greater than 2, while being of the same kind or of different kinds.

By way of example of such resins there may be mentioned the MQ resins, the MDQ resins, the DT resins and the MDT resins, which have a hydroxyl or alkyl group weight content of between 1 and 6%.

More particularly, the resins which have a molecular mass lower than 25,000 may be employed.


By way of preferred example of compounds (C) there may be mentioned the polyorganosiloxane resin 4509 marketed by the company Rhône-Poulenc, in which the molar percentage of the various units M, D and T is:

M = 15%, D = 25%, T = 60%

and the percentage, by volume, of hydroxyl functional groups = 0.5%.

Finally, it is possible within the scope of the invention to employ a mixture of at least two of the polyorganosiloxanes A, B and C.

One or more compounds corresponding to at least one of the following four general formulae (X) to (XIII) are suitable as organosilane compounds which can be employed within the scope of the invention:

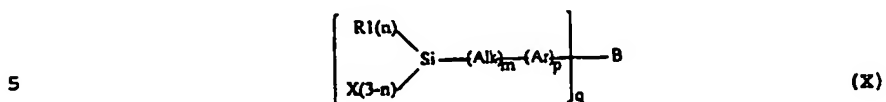

in which:

R1 denotes an alkyl group containing 1 to 10 carbon atoms, or else the phenyl radical,

X denotes a hydrolyzable group chosen from:

- 10
- the halogens, preferably chlorine,
 - alkoxy or cycloalkoxy radicals,
 - acyloxy radicals,

after hydrolysis, X may optionally denote a hydroxyl group (OH).

15

$$0 \leq n \leq 2$$

(Alk) denotes a divalent hydrocarbon group chosen from linear or branched alkyls containing from 1 to 10

carbon atoms and advantageously from 1 to 6,

m denotes 0 or 1,

(Ar) denotes a hydrocarbon group chosen from aryls, containing from 6 to 12 carbon atoms and preferably 6 to 8,

p denotes 0 or 1, with the condition that p and m are not equal to 0 simultaneously,

q = 1 or 2,




B denotes a group capable of forming a bond with at least one of the elastomers of the rubber composition. The preferred groups B are the mercapto (SH) groups in the case of q = 1 and the polysulfide (Sx) and disulfide (S₂) groups in the case of q = 2. However, the group B may also include other groups capable of reaction with the rubbery polymer, for example:

B denotes:


- if q = 2: a polysulfured functional group chosen from the following groups:

-Sx-


with $1 \leq x \leq 8$, x being a positive integer




- if $q = 1$: a functional group chosen from the following groups:




5




with $1 \leq n, n' \leq 6$ and n can be equal to n'




with $1 \leq a \leq 8$




with $1 \leq a \leq 8$

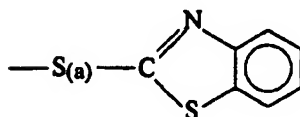


with $1 \leq a \leq 8$







with Z being a halogen residue
and preferably chloride or
bromide or a nitrogen
function, preferably amine or
amide

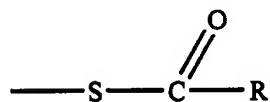

R: cyclic or acyclic alkyl or
alkenyl, and aryl



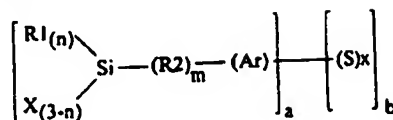

(XI)

in which:

R1 and X correspond to the same definition as that given above as legend to formula (X),

5

$$0 \leq n \leq 2,$$

(R2) denotes a divalent hydrocarbon group chosen from linear or branched alkyls and alkylenoxys, containing from 1 to 10 carbon atoms and advantageously from 1 to 6,


m denotes 0 or 1,

(Ar) denotes a hydrocarbon group chosen from aryls, containing from 6 to 12 carbon atoms,

(S)_x is a divalent polysulfide radical, each free valency being bonded directly to a carbon atom of an aromatic ring, it being possible for a number of aromatic rings to be linked together by the radical (S)_x,

$$2 \leq x \leq 6,$$

$$a \geq 2 \text{ and } b \geq 1 \text{ with } 0.4 \leq a/b \leq 2$$

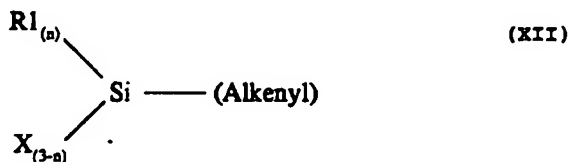

10 in which:


R1 and X correspond to the same definition as that given above as legend to formula (X),

$$0 \leq n \leq 2,$$

15 Alkenyl denotes a linear or branched hydrocarbon group, cyclic or otherwise, containing one or more double bonds, containing from 2 to 20 carbon atoms and preferably

from 2 to 6. The double bonds are preferably conjugated and/or associated at least with an activating group situated in the α position.

This class of bonding agent corresponding to the formula (XII) is preferably employed in rubber compositions with at least one radical initiator, preferably consisting of at least one peroxide.

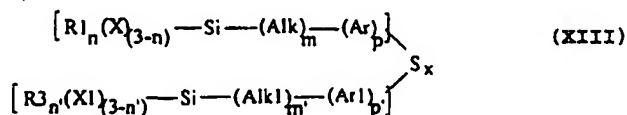

in which:

the symbols R1, R3, X, X1, Alk, Alk1, n, n', m, m', Ar, Ar1, p and p' are identical or different and correspond to the same definition as that given above as legend to formula (X),

$1 \leq x \leq 8$, Sx therefore denotes a mono-, di- or polysulfide radical,

with the condition of not simultaneously having $n = n'$, $m = m'$, $p = p'$, $X = X1$, $R1 = R3$, $Alk = Alk1$ and $Ar = Ar1$.

Examples of commercial organosilane compounds are given in the table below. Of course, the invention is not limited to these compounds.

1
2
3
4
5
6
7
8

5

10

Chemical name	Formula	Trade name/supplier
3-Mercaptopropyltrimethoxysilane	$\text{HS}(\text{CH}_2)_3\text{Si}(\text{OC}_2\text{H}_5)_3$	A-189/GSI
3-Mercaptopropyltriethoxysilane	$\text{HS}(\text{CH}_2)_3\text{Si}(\text{OC}_2\text{H}_5)_3$	Dynasylan 3201/Rule
Vinyltriethoxysilane	$\text{C}_2\text{H}_5\text{Si}(\text{OC}_2\text{H}_5)_3$	Dynasylan VTEO/Rule
3-Aminopropyltriethoxysilane	$\text{NH}_2(\text{CH}_2)_3\text{Si}(\text{OC}_2\text{H}_5)_3$	A-1100/GSI
3-Methacryloxypropyltrimethoxysilane	$\text{CH}_2=\text{CH}(\text{COO}(\text{CH}_3))\text{Si}(\text{OC}_2\text{H}_5)_3$	A-174/GSI
Mercaptomethyltrimethoxysilane	$\text{HSCH}_2\text{Si}(\text{CH}_3)_3(\text{OC}_2\text{H}_5)_3$	MS200/ABCR
Bis(trimethoxysilylpropyl) tetrasulfide	$[(\text{C}_2\text{H}_5\text{O})_3\text{Si}(\text{CH}_2)_3\text{S}_4]$	SI 68/Degussa
Bis(trimethoxysilylpropyl) tetrasulfide	$[(\text{CH}_3\text{O})_3\text{Si}(\text{CH}_2)_3\text{S}_4]$	SI 167/Degussa
3-Chloropropyltriethoxysilane	$(\text{CH}_3\text{O})_3\text{Si}(\text{CH}_2)_3\text{Cl}$	SI 130/Degussa
3-Thiocyanatopropyltriethoxysilane	$(\text{C}_2\text{H}_5\text{O})_3\text{Si}(\text{CH}_2)_3\text{SCN}$	SI 264/Degussa
Bis(trimethoxysilyl)ethyltolyl trisulfide	$[(\text{C}_2\text{H}_5\text{O})_3\text{Si}(\text{CH}_2)_3-\text{C}_6\text{H}_4(\text{CH}_2)_3(\text{Si}(\text{OC}_2\text{H}_5)_3)]$	URC2/GSI

Any precipitated or pyrogenic silicas known to a person skilled in the art, which have a BET surface $\leq 450 \text{ m}^2/\text{g}$ and a CTAB specific surface $\leq 450 \text{ m}^2/\text{g}$ are suitable as silica capable of being used in the invention, even though the highly dispersible precipitated silicas are preferred.

A highly dispersible silica is intended to mean any silica which has a capacity for deagglomeration and for dispersion in a polymeric matrix which is very great and observable by electron or optical microscopy on thin sections. The dispersibility of the silica is also assessed by means of a test for capacity for being deagglomerated by ultrasonics, followed by a measurement, by scattering on a particle size analyzer, of the size of the silica particles, in order to determine the median diameter (D50) of the particles and the deagglomeration factor (Fd) after deagglomeration as described in Patent Application EP-A-0 520 860, the content of which is incorporated here, or in the article published in the journal Rubber World, June 1994, pages 20-24, entitled "Dispersibility Measurements of Prec. Silicas".

As nonlimiting examples of such preferred highly dispersible silicas there may be mentioned those which have a CTAB surface equal to or lower than $450 \text{ m}^2/\text{g}$ and particularly those described in European Patent Applications

EP-A-0 157 703 and EP-A-0 520 862, the content of which is incorporated here, or the silica Perkasil KS 430 from the company Akzo, the silicas Zeosil 1165 MP and 85 MP from the company Rhône-Poulenc, the silica HI-Sil 2000 from the
5 company PPG and the silicas Zeopol 8741 or 8745 from the company Huber.

However, by way of greater preference, the silicas which are suitable have:

- a CTAB specific surface of between 120 and 200 m²/g, preferably between 145 and 180 m²/g,
- a BET specific surface of between 120 and 200 m²/g, preferably between 150 and 190 m²/g,
- a DOP oil uptake lower than 300 ml/100 g, preferably between 200 and 295 ml/100 g,
- a median diameter (ϕ 50), after ultrasonic deagglomeration, equal to or lower than 3 μ m, preferably lower than 2.8 μ m, for example lower than 2.5 μ m,
- an ultrasonic deagglomeration factor (F_p) higher than 10 ml, preferably higher than 11 ml and more preferably \geq 21 ml,
- a BET specific/CTAB specific surface ratio \geq 1.0 and \leq 1.2.

The physical state in which the silica is present, that is to say whether it is present in the form of powder,

of microbeads, of granules or of beads, is immaterial.

Silica is, of course, also intended to include blends of various silicas. The silica may be employed alone or in the presence of other white fillers. The CTAB specific surface is determined according to NFT method 45007 of November 1987. The BET specific surface is determined according to the Brunauer, Emmet and Teller method described in "The Journal of the American Chemical Society", vol. 80, page 309 (1938), corresponding to NFT standard 45007 of November 1987. The DOP oil uptake is determined according to NFT standard 30-022 (March 1953), using dioctyl phthalate.

Elastomers capable of being used in the compositions in accordance with the invention are intended to mean:

- 1) any homopolymer obtained by polymerization of a conjugated diene monomer containing from 4 to 12 carbon atoms,
- 2) any copolymer obtained by copolymerization of one or more conjugated dienes with each other or with one or a number of aromatic vinyl compounds containing from 8 to 20 carbon atoms,
- 3) the tertiary copolymers obtained by copolymerization of ethylene, of an α -olefin containing 3 to 6 carbon atoms

with an unconjugated diene monomer containing from 6 to 12 carbon atoms, like, for example, the elastomers obtained from ethylene and propylene with an unconjugated diene monomer of the above-mentioned type such as especially 1,4-hexadiene, ethylidenenorbornene and dicyclopentadiene,

- 4) the copolymers obtained by copolymerization of isobutene and of isoprene (butyl rubber), as well as the halogenated, in particular chlorinated or brominated, versions of these copolymers.

Conjugated dienes which are particularly suitable are 1,3-butadiene, 2-methyl-1,3-butadiene, 2,3-di(C₁-C₃-alkyl)-1,3-butadienes such as, for example, 2,3-dimethyl-1,3-butadiene, 2,3-diethyl-1,3-butadiene, 2-methyl-3-ethyl-1,3-butadiene, 2-methyl-3-isopropyl-1,3-butadiene, phenyl-1,3-butadiene, 2-chloro-1,3-butadiene, 1,3-pentadiene, 2,4-hexadiene, and the like.

Aromatic vinyl compounds which are suitable are especially styrene, ortho-, meta- and para-methylstyrene, the commercial vinyltoluene mixture, para-tert-butylstyrene, methoxystyrenes, chlorostyrenes, vinylmesitylene, divinylbenzene, vinylnaphthalene, and the like.

The copolymers may contain between 99% and 20% by

weight of diene units and from 1% to 80% by weight of vinylaromatic units. The elastomers may have any microstructure that is a function of the polymerization conditions employed, especially of the presence or absence of a modifying and/or randomizing agent and of the quantities of modifying and/or randomizing agent which are employed. The elastomers may be of block, random, sequential, microsequential or other structure and may be prepared in dispersion or in solution.

Those preferably suitable are the polybutadienes and in particular those which have a 1,2-unit content of between 4% and 80% and those which have more than 90% of cis 1,4 bonds, polyisoprenes, butadiene-styrene copolymers and in particular those which have a styrene content of between 5% and 50% by weight and more particularly between 20% and 40% by weight, a 1,2 bond content of the butadiene portion of between 4% and 65%, a trans 1,4 bond content of between 30% and 80%, those which have an overall content of aromatic compound of between 5% and 50% and a glass transition temperature (T_g) of between 0°C and -80°C, and particularly those which have a styrene content of between 25% and 30% by weight, a content of vinyl bonds in the butadiene portion of between 55% and 65%, a trans 1,4 bond content of between 20% and 25% and a glass transition temperature of between -20°C and -30°C.

In the case of butadiene-styrene-isoprene

copolymers, those which are suitable have a styrene content of between 5 and 50% and more particularly between 10% and 40%, an isoprene content of between 15% and 60% by weight

5 and more particularly between 20% and 50% by weight, a butadiene content of between 5 and 50% and more particularly between 20% and 40% by weight, a content of 1,2-units in the butadiene portion of between 4% and 85%, a content of trans 1,4 units in the butadiene portion of between 6% and 80%, a
10 content of 1,2 plus 3,4-units in the isoprene portion of between 5% and 70% and a content of trans 1,4 units in the isoprene portion of between 10% and 50%.

The elastomer may, of course, be coupled and/or starred or else functionalized with a coupling and/or
15 starring or functionalizing agent. The elastomer may also be natural rubber or a blend based on natural rubber with any synthetic, especially diene-based, elastomer.

Besides one or more elastomers and the silica, the compositions in accordance with the invention contain all or
20 part of the other constituents and additives usually employed in rubber mixes, like plasticizers, pigments, antioxidants, antiozonant waxes, a crosslinking system based either on sulfur, sulfur donors and/or on peroxide and/or on bismaleimides, vulcanization accelerators, extender oils,
25 one or more silica-coating agents such as alkoxysilanes,

polyols, amines, and the like.

The compositions in accordance with the invention may contain between 0.5 and 15 parts by weight of functionalized polyorganosiloxane compound(s) and from 0.2
5 to 8 parts by weight of functionalized organosilane compound(s).

In a way which could not be foreseen by a person skilled in the art, it has been discovered that the rubber compositions in accordance with the invention and including
10 a reinforcing additive consisting of at least one linear or cyclic functionalized polyorganosiloxane and at least one organosilane compound exerting a rubber/silica bond, make it possible:

- to employ high ratios of organosilane agents belonging
15 to the mercaptosilane class, without incurring a penalty in terms of "scorch safety" and without perturbing the processing of the compositions,
- to increase appreciably the effectiveness of the organosilane agents and particularly those of the
20 mercaptosilane type,
- to prepare silica-filled vulcanizates exhibiting an improved hysteresis, which makes these compositions particularly useful for the manufacture not only of tires but also of semifinished products, especially of

treads, of underlinings, of sidewall rubbers or of rubbers intended to adhere to textile or metal reinforcements,

- 5 - to obtain good processing properties in the raw state by virtue of a reduction in viscosity,
- to facilitate the adjustment of the content of rubber/silica reinforcement agent (in particular in the case of low contents), through the use of two products instead of one, without necessarily being penalized in terms of processing and scorch safety,
- 10 - in general, to prepare silica-filled vulcanizates exhibiting an advantageous compromise of properties when compared with the solutions already known in the art.

15 The maximum beneficial effect is obtained when the highly dispersible silica forms all of the reinforcing filler. A beneficial effect is also obtained when the silica is employed predominantly or blended with conventional precipitated silicas, or else with carbon black: carbon
20 blacks which are suitable are any carbon blacks, especially all the commercially available blacks and preferably the HAF, ISAF, SAF and other blacks conventionally employed in tires and particularly in tire treads. As nonlimiting examples of such blacks may be mentioned the blacks N 134,
25 N 115, N 234, N 339, N 347, N 375, and the like.

5 The quantity of carbon black which is present may vary within wide limits, it being understood, however, that the improvement in the properties will be proportionally greater the higher the silica content present. The quantity of carbon black which is present is preferably equal to or lower than 200% of the quantity of silica present in the composition.

10 Another subject-matter of the invention is a process for improving the hysteretic properties of rubber compositions including silica as reinforcing filler which are intended for the manufacture of tire casings and of semifinished products for tire casings, which consists in adding to the compositions a reinforcing additive consisting of the addition and the mixing, in any order, of at least one functionalized polyorganosiloxane compound containing, per molecule, at least one functional siloxy unit capable of bonding chemically and/or physically with the surface hydroxyl sites of the silica particles and at least one functionalized organosilane compound containing, per molecule, at least one functional group capable of bonding chemically and/or physically with the polyorganosiloxane and/or the hydroxyl sites of the silica particles and at least one other functional group capable of bonding chemically and/or physically to the chains of polymer(s).

25 Another subject-matter of the invention is a process

making it possible to delay substantially the premature vulcanization (scorching) of diene rubber compositions intended for the manufacture of tire casings and of semifinished products for tire casings, including silica as
5 reinforcing filler.

The process according to the invention consists in adding and incorporating into the rubber of the composition a reinforcing additive for establishing an elastomer/silica bond, consisting of a functionalized polyorganosiloxane
10 compound containing, per molecule, at least one functional siloxy unit capable of bonding chemically and/or physically with the surface hydroxyl sites of the silica particles and at least one functionalized organosilane compound containing, per molecule, at least one functional group capable of
15 bonding chemically and/or physically with the polyorganosiloxane and/or the hydroxyl sites of the silica particles and at least one other functional group capable of bonding chemically and/or physically to the chains of polymer(s).

The two constituents of the reinforcing additive may
20 be added in any order, that is to say simultaneously or one after the other; the functionalized polyorganosiloxane compound is preferably added first before the addition of the organosilane compound. It is also possible to react the polyorganosiloxane with the silica before the latter is
25 mixed with the rubber. This process enables the mercapto-

silanes to be used on industrial scale by delaying the appearance of the phenomenon of scorching of the composition containing silica as reinforcing filler. This effect of delaying the appearance of the scorching phenomenon offers
5 an advantage in the case of the mercaptosilanes, as well as in the case of other organosilane compounds, in the sense that it makes it possible to decrease the quantity of organosilane, which is generally very costly, needed without significantly affecting the compromise of the composition in
10 terms of scorch safety, of ease of processing and of reinforcing power. The process according to the invention is thus capable of reducing the costs of manufacture.

The functionalized polyorganosiloxane compound acts as a covering agent, in contrast to a reinforcing function,
15 when it is mixed with the silica in the presence of at least one elastomer forming part of the rubber composition used to manufacture the tire casing. In other words, the siliceous filler is covered with the organopolysiloxane compound(s).

The invention is illustrated, without any limitation
20 being implied, by the examples which must not be taken to constitute a limitation of the scope of the invention. In the examples the properties of the compositions are evaluated as follows:

- Mooney viscosity ML (1+4) at 100°C measured according

to standard AFNOR-NF-T43-005 (November 1980), entitled Mooney in the tables which follow.

- Moduli of elongation at 300% (M 300), 100% (M 100): measurements performed in MPa according to standard AFNOR-NF-T46-002 (September 1988).
5
- Tensile strength (TS) in MPa and elongation at break (EB) in %: measurements performed at 20°C according to standard AFNOR-NF-T40-101 (September 1979)
- Hysteretic losses (HL): measured by rebound at 60°C on 6th impact and expressed in %.
10
- Dynamic shear properties:
Measurements as a function of the deformation: performed at 10 Hertz with a crest-crest deformation ranging from 0.15% to 50%. The hysteresis is expressed by the measurement of $\tan \delta$ at 7% deformation. The dynamic modulus (G) for the highest deformation level is expressed in N/m². The measurements are performed according to ASTM standard D 2231-87;
15
- Scorch time: (T5) expressed in minutes.
Time needed to obtain an increase in the value of the consistometry index, expressed in "Mooney units", by 5 units
20

above the minimum value measured in the case of this index.
Measurements performed at 130°C according to standard AFNOR-
NF-T43-005 (November 1980).

- Rheometric characteristics:

- 5 The following values are deduced from the vulcanization
curves:

Ts (0.2): time in minutes needed for the increase in the
torque by 0.2 N m from the minimum Mooney ML (1+4)100
torque.

- 10 Tc (99): vulcanization time in minutes corresponding to 99%
of the highest torque obtained.

The measurements are performed at 150°C according to
standard AFNOR-NF-T43-015 (August 1975).

DESCRIPTION OF THE DRAWINGS

- 15 Figures 1 to 4 show the vulcanization curves for
various rubber compositions including various reinforcing
additives. The vulcanization period of the compositions,
expressed in minutes, is shown as the abscissa. The
rheometric torque, expressed in decanewtons per meter (dN/m)
20 is shown as the ordinate.

DESCRIPTION OF PREFERRED EMBODIMENTS

In the examples the contents of materials are


expressed in phr: parts per hundred of elastomer by weight.

Example 1

This example is intended to compare two rubber compositions which are identical with the exception of the coating additive which, in the case of test 1, the control test, is Dynasylan 3201 and, in the case of test 2, in accordance with the invention, consists of Dynasylan 3201 and the functionalized polyorganosiloxane (PMHS) corresponding to the formula (V-2) shown above. This functionalized PMHS is prepared as follows:

Into a 500 ml three-necked round bottom flask equipped with mechanical stirring, a thermometer and a dropping funnel are charged, under nitrogen atmosphere, 300 ml of ethanol predried on 3 angstrom molecular sieve and 10 μ l of Karstedt catalyst (10% in hexane). The mixture is stirred and dropwise addition of polymethylhydrosiloxane (40 g, $dp_n = 50$) is started. The rate of addition of the Si-H fluid is adjusted to control the flow rate of hydrogen and the exothermicity of the reaction. At the end of addition the mixture is left stirring for one hour. 36 g of 1-octene are then added dropwise. After addition the reaction mixture is heated to 60°C until all the Si-H functional groups have been consumed. The excess of alcohol and of octene is then evaporated off. 87 g of clear and

slightly colored oil are recovered. NMR analysis shows the following structure (NMR):

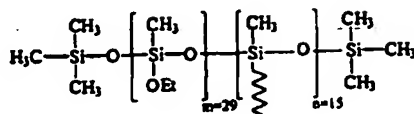

The diene polymers are processed by thermomechanical working in two stages in an internal mixer, which last 5 and 4 minutes respectively, with a mean blade speed of 45 rev/min, until a maximum drop temperature of 160°C is reached, followed by a finishing stage performed at 30°C on an external mixer, under the following formulations:

Table 1

Composition No.	1	2
SBR (1)	96	96
PB (2)	30	30
Silica (3)	80	80
ZnO	2.5	2.5
Stearic acid	2	2
Antioxidant (4)	1.9	1.9
PMHS (5)		4.5
Dynasylan 3201 (6)	2.8	2
Aromatic oil	6	6
Sulfur	1.1	1.1
CBS (7)	2	2
DPG (8)	1.5	1.5

(1) : SBR which has 59.5% of 1,2 bonds, 23% of trans bonds, 26% of styrene incorporated and extended with 37.5% of oil;

- (2) : PB which has 4.3% of 1,2 bonds, 2.7% of trans bonds,
93% of cis 1,4 bonds
(3) : Zeosil 1165 MP silica from the company Rhône-Poulenc
(4) : N-1,3-Dimethylbutyl-N-phenyl-para-phenylenediamine
5 (5) : Functionalized PMHS corresponding to the formula
(V-2)
(6) : γ -Mercaptopropyltriethoxysilane marketed by the
company Huls
(7) : N-Cyclohexyl-2-benzothiazylsulfenamide
10 (8) : Diphenylguanidine

The properties of the rubber compositions
measured before curing (Mooney) and the rheograms at 150°C
are shown respectively in Table 2 and in Figure 1.

Table 2

Composition No.	1	2
Properties before curing		
Mooney	137	90
T5 (min)	3.5	22.5

In Figure 1, curve C1 corresponds to the reference composition 1 with the mercaptosilane alone and curve C2 corresponds to the composition 2 in accordance with the invention. The scorch time results and the rheograms of Figure 1 show that the invention allows the scorch safety to be considerably increased. In addition, the invention facilitates processing of the rubber compositions containing a mercaptosilane.

Example 2:

This example is also intended to show the need for, and the advantage of, employing a bonding agent simultaneously with a functionalized PMHS. Two compositions are produced which are identical with those of Example 1 with the exception of the contents of PMHS and Dynasylan 3201.

TABLE 3

Composition No.	3	4
SBR	96	96
PB	30	30
Silica	80	80
ZnO	2.5	2.5
Stearic acid	2	2
Antioxidant	1.9	1.9
Aromatic oil	6	6
PMHS	5	5
Dynasylan 3201		1.5
Sulfur	1.1	1.1
CBS	2	2
DPG	1.5	1.5

The properties of the rubber compositions measured before and after curing are listed in Table 4.

TABLE 4

Composition No.	3	4
Properties before curing		
Mooney	75	88
T5 (min)	> 30	> 30
Cure time at 150°C in minutes	60	40
Properties after curing		
M100	0.68	1.5
M300	2.47	6.75
HL	41.7	24.6
EB	1040	580
TS	16.8	19.6
Dynamic properties		
tan δ	0.324	0.257

The results show that composition 3, containing no mercapto-silane, has a low level of reinforcement. On the other hand, the results obtained with composition 4 make it possible to demonstrate that the use of the invention gives a higher and

a satisfactory level of reinforcement and lower hysteresis levels without significantly penalizing the properties before curing and consequently the processing.

Example 3:

5 The aim of this example is to demonstrate the advantage of the invention when compared with the use, known in the art, of a combination including a bonding agent of mercaptosilane type and an alkylsilane.

10 Two compositions are produced which are identical with those of Example 1 with the exception of the contents of covering additive and of sulfur and, in the case of control composition 5, the addition of an alkylsilane.

TABLE 5

Composition No.	5	6
SBR	96	96
PB	30	30
5 Silica	80	80
ZnO	2.5	2.5
Stearic acid	2	2
Antioxidant	1.9	1.9
Aromatic oil	6	6
10 PMHS (9)		4
Dynasylan 3201	1.1	1.1
Si 216 (*)	4	
Sulfur	2.4	2.4
CBS	2	2
15 DPG	1.5	1.5

(9) Functionalized PMHS corresponding to the formula (V-3)

(*) Si 216: covering agent of raw formula $C_{16}H_{33}Si(OEt)_3$, marketed by the company Degussa

The results are listed in Table 6.

TABLE 6

Composition No.	5	6
Properties before curing		
Mooney	80	78
T5 (min)	15	23
Cure time at 150°C in minutes	40	40
Properties after curing		
M100	1.69	2.04
M300	5.89	7.52
HL	30.3	30.9
EB	540	480
TS	21.4	21.1
Dynamic properties		
tan δ	0.244	0.254

Composition 6, in accordance with the invention, enables scorch times T5 to be obtained which are superior to those obtained with the composition in accordance with the state of the art, employing the combination of a mercaptosilane and of an alkylsilane, while facilitating the processing.

In addition, composition 6, in accordance with the invention, makes it possible to obtain, at equivalent contents of constituent materials, a reinforcement level which is far superior to that of the control composition.

Example 4:

This example is intended to demonstrate that the invention makes it possible to introduce into the rubber compositions large quantities of organosilanes
5 which have a mercapto functional group. The compositions thus prepared remain easy to process and exhibit a satisfactory scorch safety.

Three compositions in accordance with the invention are prepared, which are identical with those of Example 1 with
10 the exception of the quantities of mercaptosilane, which vary.

TABLE 7

Composition No.	7	8	9
SBR	96	96	96
PB	30	30	30
Silica	80	80	80
ZnO	2.5	2.5	2.5
Stearic acid	2	2	2
Antioxidant	1.9	1.9	1.9
Aromatic oil	6	6	6
PMHS	4.5	4.5	4.5
Dynasylan 3201	1	1.5	2
Sulfur	1.1	1.1	1.1
CBS	2	2	2
DPG	1.5	1.5	1.5

The results of the rubber compositions measured before and after curing are listed in Table 8.

TABLE 8

Composition No.	7	8	9
Properties before curing			
Mooney	87	88	91
T5 (min)	> 30	> 30	> 30
Cure time at 150°C in minutes	40	40	40
Properties after curing			
M100	1.51	1.49	1.54
M300	6.34	6.75	7.32
HL	25.9	24.6	23.2
EB	620	590	510
TS	19.8	19.3	17.7
Dynamic properties			
G	1.58×10^6	1.58×10^6	1.52×10^6
tan δ	0.263	0.255	0.24

The results show that the invention allows the mercapto-silane content to be increased without incurring any penalty in terms of scorch safety, which remains satisfactory, and of processing of the compositions.

Consequently, the invention makes it possible to prepare rubber compositions with high contents of bonding agent of the mercaptosilane class, in contrast to what was possible according to the prior state of the art.

Example 5

This example is intended to demonstrate the advantage of the invention in relation to the use of Si 69 (bis(3-triethoxysilylpropyl) tetrasulfide) marketed by the company Degussa, which is considered to be the product giving the best compromise in the case of compositions including silica as reinforcing filler, in terms of scorch safety, ease of processing and reinforcing power.

Two compositions are prepared which are identical with those of Example 1 with the exception, in the case of control composition 10, of the use of Si 69 alone as reinforcing additive and, in the case of composition 11, in accordance with the invention, of the Dynasylan 3201 content.

TABLE 9

Composition No.	10	11
SBR	96	96
PB	30	30
5 Silica	80	80
ZnO	2.5	2.5
Stearic acid	2	2
Antioxidant	1.9	1.9
Aromatic oil	6	6
10 PMHS		4.5
Dynasylan 3201		1.5
Si 69	6.4	
Sulfur	1.1	1.1
CBS	2	2
15 DPG	1.5	1.5

The properties of the rubber compositions measured before and after curing are listed in Table 10.

TABLE 10

Composition No.	10	11
20 Properties before curing		
Mooney	82	88
T5 (min)	25	> 30
Cure time at 150°C in minutes	40	40
Properties after curing		
25 M100	1.56	1.49
M300	6.97	6.75
HL	26.4	24.6
EB	560	590
TS	19.5	19.3
30 Dynamic properties		
tan δ	0.299	0.255

It is found that the invention makes it possible to improve the scorch safety and to decrease the hysteresis

without substantially penalizing the other properties.

Example 6

This example is intended to demonstrate that the beneficial effect of the invention is also obtained with rubber compositions based on natural rubber which are reinforced with silica. Three compositions are prepared according to the formulations shown in Table 11.

TABLE 11

Composition No.	12	13	14
10 Natural rubber	100	100	100
Silica (3)	50	50	50
ZnO	5	5	5
Stearic acid	2	2	2
Antioxidant (4)	1.9	1.9	1.9
15 PMHS (5)		2.5	
PMHS (9)			2.5
A 189 (10)	3	1.5	1.5
Sulfur	1.3	1.3	1.3
CBS (7)	2	2	2
20 DPG (8)	1.1	1.1	1.1

The materials (3) (4) (5) (7) and (8) are identical with those in Example 1. Material (9) is identical with that of Example 3.

(10): γ -Mercaptopropyltrimethoxysilane marketed by the company OSI.

Composition 12 is a control composition containing only one mercaptosilane compound, the rheogram of which is shown in Figure 2 by curve C3; compositions 13 and 14 are in

accordance with the invention and their rheograms are shown in Figure 2 by curves C4 and C5 respectively. The properties of the rubber compositions measured before curing and after curing and the rheograms at 150°C are shown in Table 12 and in Figure 2 respectively.

TABLE 12

Composition No.	12	13	14
Properties before curing			
Mooney T5 (min)	102 0	54 12.5	53 12
Rheometric characteristics			
Ts (0.2) min	0	4.5	4.5
Tc (99) (min)	5	11	11
Cure time at 150°C in minutes		20	20
Properties after curing			
	Premature vulcanization		
M100		1.77	1.79
M300		5.7	5.85
HL		15.2	14.6

A considerable improvement in the scorch safety is observed throughout the measurements of the scorch time and of the rheometric characteristics. Furthermore, the invention makes it possible to improve the processing and to allow on industrial scale the production of compositions with a bonding agent of the mercaptosilane class.

Example 7

Two compositions are produced which are identical with those of Example 5, except that in the case of composition 16, in accordance with the invention, the quantity of PMHS (5) is higher than in composition 11.

TABLE 13

Composition No.	15	16
SBR	96	96
PB	30	30
Silica	80	80
ZnO	2.5	2.5
Stearic acid	2	2
Antioxidant	1.9	1.9
Aromatic oil	6	6
PMHS		6
Dynasylan 3201		1.5
Si 69	6.4	
Sulfur	1.1	1.1
CBS	2	2
DPG	1.5	1.5

Composition 15 is a reference composition identical with composition 10 of Example 5, already known in the art, and capable of being used for producing a tire casing tread.

The properties of the rubber compositions measured before and after curing are shown in Table 14.

TABLE 14

Composition No.		15	16
Properties before curing			
5	Mooney	82	86
	T5 (min)	25	> 30
	Cure time at 150°C in minutes	40	40
Properties after curing			
10	M100	1.56	1.59
	M300	6.97	7.5
	Hysteresis	26.4	22.3
	EB	560	530
	TS	19.5	18.1
Dynamic properties			
15	G	3.67×10^6	1.97×10^6
	tan δ	0.299	0.231

The results show that the composition in accordance with the invention makes it possible to obtain properties before curing which are similar to those obtained with Si 69 and that, after curing, it has a reinforcement level identical with that of reference composition 15, while the hysteresis and tan δ levels are considerably lower, and this makes such a composition particularly suitable for forming part of the constitution of semifinished products, especially treads, capable of giving tire casings which have a reduced rolling resistance.

Example 8

This example shows the advantage of a rubber composition in accordance with the invention and crosslinking with sulfur, for coating and adhering to a metal reinforcement intended to be employed in a tire casing.

Three compositions are produced according to the formulations described in Table 15. Composition 17 is a reference composition containing no elastomer/silica reinforcement additive. Composition 18 is also a control composition containing only γ -mercaptopropyltriethoxysilane.. Composition 19 is in accordance with the invention.

TABLE 15

Composition No.	17	18	19
Natural rubber	100	100	100
Silica (12)	50	50	50
ZnO	4	4	4
Stearic acid	1	1	1
Antioxidant (4)	2	2	2
Cobalt salt (13)	0.7	0.7	0.7
PMHS (11)			2.5
Dynasylan 3201 (6)		1	1
Sulfur	4.5	4.5	4.5
CBS (7)	0.8	0.8	0.8
DPG (8)	0.8	0.8	0.8

Materials (4), (6), (7) and (8) are the same as those in Example 1

- (11): Functionalized PMHS corresponding to the formula (V-4)
 (12): Ultrasil VN 2 silica marketed by the company Degussa
 (13): Cobalt naphthenate

The properties of the rubber compositions measured before and after curing at 150°C are shown, respectively, in Table 16.

TABLE 16

Composition No.	17	18	19
Properties before curing			
Mooney	94	82	74
Cure time at 150°C in minutes	35	35	35
Properties after curing			
M100	1.69	2.22	2.06
M300	4.08	6.36	5.91
HL	20.7	17.2	14.5
EB	590	570	510
TS	22.1	23.6	22.1

It is found that the composition in accordance

with the invention has processing properties in the
unvulcanized state which are superior to those of the
compositions according to the prior art. In other words, the
use of the reinforcing additive according to the invention
5 allows the Mooney viscosity to be improved.

It is also found that the composition in
accordance with the invention has a hysteresis which is
clearly improved without incurring a penalty in the
reinforcing properties and the mechanical properties of the
10 composition.

Example 9:

The aim of this example is to show that a
reinforcing additive including polyorganosiloxanes which are
functionalized "at the chain end" can also be employed
15 within the scope of the invention. Three compositions are
produced according to the formulations described in Table
17.

The compositions 15 and 20 are control
compositions in accordance with the state of the art,
20 employing only a bonding agent. Their rheograms are shown in
Figure 3 by curves C6 and C7 respectively. Composition 21 is
in accordance with the invention and the rheogram is shown
in Figure 3 by curve C8.

TABLE 17

Composition No.	15	20	21
SBR (1)	96	96	96
PB (2)	30	30	30
Silica (3)	80	80	80
ZnO	2.5	2.5	2.5
Stearic acid	2	2	2
Antioxidant (4)	1.9	1.9	1.9
Aromatic oil	6	6	6
PS 340 (14)			4.5
Dynasylan 3201 (6)		1.8	1.8
Si 69	6.4		
Sulfur	1.1	1.1	1.1
CBS (7)	2	2	2
DPG (8)	1.5	1.5	1.5

Materials (1), (2), (3), (4), (6), (7), (8) and Si 69 are the same as those in Example 1.

(14): PS340 polydimethylsiloxane functionalized with OH at chain ends, marketed by ABCR.

The properties of the rubber compositions measured before and after curing at 150°C, and the rheograms produced at 150°C are shown in Table 18 and in Figure 3 respectively.

TABLE 18

Composition No.	15	20	21
Properties before curing			
Mooney	-82	105	90
Rheometric characteristics			
Ts (0.2)	5	0	8
Tc (99)	34	27	30
Cure time at 150°C in minutes	40	40	40
Properties after curing			
M100	1.56	1.68	2.44
M300	6.97	4.38	10.92
HL	26.4	35	19.8

Throughout the Mooney viscosity results we see that the invention makes it possible to facilitate the processing of the rubber compositions comprising a high content of reinforcing agent of the mercaptosilane type.

It is also seen that the composition in accordance with the invention makes it possible to obtain rigidities (M100 and M300) which are clearly superior to those of the reference compositions and that the hysteretic properties are clearly improved in relation to those measured in the case of the control compositions 15 and 20.

Furthermore, the rheometric characteristics, and the curves in Figure 3, show that the invention makes it possible to employ a mercaptosilane, because it gives rise to a large increase in the scorch safety of the composition.

Example 10:

The aim of this example is to demonstrate that the rubber compositions in accordance with the invention which are reinforced at the same time with silica and with carbon

5 black have an improved processing.

2 compositions are produced according to the formulations described in Table 19. Composition 22 is a control composition, while composition 23 is in accordance with the invention.

TABLE 19

Composition No.	22	23
SBR (15)	137.5	137.5
Silica (3)	40	40
Black N 234	15	15
ZnO	3	3
Stearic acid	2	2
Antioxidant (4)	1.5	1.5
PMHS (11)		2.5
Dynasylan 3201 (6)	1	1
Sulfur	1.4	1.4
CBS (7)	1.4	1.4

Materials (3), (4), (6) and (7) are the same as those in Example 1.

Material (11) is that employed in Example 8.

(15): Emulsion SBR (Cariflex 1712) which has 16% of 1,2 bonds, 72% of trans bonds and 23.5% of incorporated styrene, extended with 37.5% of oil and marketed by Shell.

The properties of the rubber compositions measured in the raw state are shown in Table 20.

TABLE 20

Composition No.	22	23
Properties before curing		
Mooney	114	97
T5 (min)	> 30	> 30

It is found that the composition in accordance with the invention still has a Mooney viscosity which is

lower than that of the control composition when the reinforcing filler in the composition is a blend of carbon black and of silica.

Example 11:

5 This example is intended to demonstrate that the compositions in accordance with the invention have improved properties with a reduced Si 69 content when it is employed in combination with a functionalized polyorganosiloxane.

10 Two compositions are produced according to the formulations described in Table 21. Composition 24 is a control composition in accordance with the state of the art. Composition 25 is in accordance with the invention.

TABLE 21

Composition No.	24	25
SBR (1)	96	96
PB (2)	30	30
Silica (3)	80	80
ZnO	2.5	2.5
Stearic acid	2	2
Antioxidant (4)	1.9	1.9
Aromatic oil	6	6
PMHS (11)		4.5
Si 69	2	2
Sulfur	1.1	1.1
CBS (7)	2	2
DPG (8)	1.5	1.5

Materials (1), (2), (3), (4), (7) and (8) are the same as those employed in Example 1 and material (11) is that employed in Example 8.

The properties of the rubber compositions measured before curing and the rheometric characteristics obtained at 150°C are shown in Table 22.

Figure 4 contains the rheograms of compositions 24 and 25, shown by curve C9 and curve C10 respectively.

TABLE 22

Composition No.	24	25
Properties before curing		
Mooney T5 (min)	113- 6	65 > 30
Rheometric characteristics (150°C)		
Ts (0.2) (min)	0	15
Tc (99) (min)	indeterminate	35

10 The results show that the invention makes it
 possible to obtain rubber compositions which
 are highly filled with silica and which have an excellent
 processability, but with a reduced Si 69 content, and this
 makes it possible to achieve savings in the production costs
 of compositions containing silica as a reinforcing filler
 15 without incurring any penalty in the compromise in terms of
 scorch safety.

Example 12:

20 This example is intended to demonstrate that the
 compositions in accordance with the invention have
 properties which are equivalent to those obtained when Si 69
 is employed, but with an overall reinforcing additive
 content which is clearly decreased.

Two compositions are produced according to the formulations
 described in Table 23. Composition 15, already described in
 25 Example 7, is in accordance with the state of the art;

composition 27 is in accordance with the invention.

TABLE 23

Composition-No.	15	27
5 SBR (1)	96	96
PB (2)	30	30
Silica (3)	80	80
ZnO	2.5	2.5
Stearic acid	2	2
Antioxidant (4)	1.9	1.9
10 Aromatic oil	6	6
PS 340 (14)		2.5
Dynasylan 3201 (6)		1.1
Si 69	6.4	
Sulfur	1.1	1.1
15 CBS (7)	2	2
DPG (8)	1.5	1.5

Materials (1), (2), (3), (4), (6), (7), (8) and (14) are the same as those in the preceding examples.

The properties of the rubber compositions measured before and after curing at 150°C are shown in Table 24.

TABLE 24

Composition No.	15	27
Properties before curing		
Mooney	82	90
T5 (min)	25	> 30
Cure time at 150° C in minutes	40	40
Properties after curing		
M100	1.56	1.62
M300	6.97	6.75
HL	26.4	26.2
EB	560	600
TS	19.5	21.8

The results show that the composition in accordance with the invention makes it possible to obtain properties before curing which are close to those obtained with SI 69 and that after curing it has a reinforcement level identical with 5 that of the control composition No. 15, but with an overall reinforcing additive content which is clearly lower (3.6 phe against 6.4 phe), which makes it possible to achieve savings in the costs of the compositions, without incurring a penalty in the compromise of the properties.

"Comprises", "comprising" when used in this specification is taken to 10 specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

15



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A tire having improved hysteretic properties including (I) textile or metal reinforcements and (II) a rubber composition, the rubber composition including a mixture of at least: (A) one diene elastomer; (B) silica as a reinforcing filler; and (C) a reinforcing additive consisting essentially of a mixture and/or the product of in situ reaction of (i) at least one functionalized polyorganosiloxane compound containing, per molecule, at least one functional siloxy unit capable of bonding chemically and/or physically with the surface hydroxyl sites of said silica particles and (ii) at least one functionalized organosilane compound containing, per molecule, at least one functional group capable of bonding chemically and/or physically with said polyorganosiloxane and/or the hydroxyl sites of said silica particles and at least one other functional group capable of bonding chemically and/or physically to the chains of the diene elastomer.

2. The tire as claimed in claim 1, wherein the functionalized polyorganosiloxane compound is chosen from the following compounds:

(A)— the compounds bearing, per molecule, a functional unit selected from the group consisting of

— α — at least one functional siloxy unit of formula:



in which:

$a = 0, 1$ or 2 ;

R is a monovalent hydrocarbon radical chosen from linear or branched alkyls containing from 1 to 6 carbon atoms, or from aryls, the radicals R being identical or different when $a = 2$; and

Y is a C_1 - C_{15} linear or branched alkoxy radical;

— β — at least one functional siloxy unit of formula:



in which:

$b = 0, 1$ or 2 ;



R corresponds to the same definition as that given above for the substituent R of formula (I) and may be identical with or different from the latter; and

W is a monovalent hydrocarbon radical containing from 2 to 30 carbon atoms and constituting a functional residue bonded to silicon by an Si—C bond, this residue being chosen from the following groups:

- (i) a linear or branched alkyl group containing at least 7 carbon atoms;
- (ii) a linear or branched C_2-C_{20} alkenyl group containing one or more double bonds in and/or at the end(s) of the chain(s); or
- (iii) a saturated or unsaturated aliphatic mono- or polycyclic group containing 5 to 20 carbon atoms and one or more ethylenic double bond(s) in the ring(s); and

—Y— at least one functional siloxy unit of the following formula:




in which

$c = 0, 1, 2$ or 3 , $d = 1$ and $c+d \leq 3$; and

the substituent R being as defined above in formulae (I) and (II);

(B)—the compounds of formula (IV):

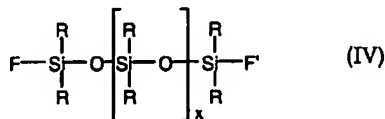

in which:

R is a hydrocarbon radical corresponding to the same definition as that of R given above as legend to formula (I), or a linear or branched C_2-C_{20} alkenyl group containing one or more double bonds; the various exemplars of R may be identical with or different from each other;

$x = 0$ to 500 ; and

F and F' are monovalent radicals chosen from hydrogen, the halogens, those corresponding to the definition of R, hydroxyl, alkoxy, enoxy, acyloxy, acetoxy, oxime and amine functional groups; F and F' may be different or identical, but in the latter case it must not be the radical R; and



(C)— polyorganosiloxane resins containing monovalent radicals and/or reactive functional groups F and F', these symbols having the same definition as that given above as legend to formula (IV).


3. The tire as claimed in claim 2, wherein substituent W of the formula (II) is chosen from the following radicals:

a radical (i) containing from 10 to 30 carbon atoms;

a C_6-C_{10} radical (ii), containing one or more double bonds which may be conjugated or unconjugated with each other;

a saturated or unsaturated aliphatic monocyclic or polycyclic group (iii) containing 5 to 20 carbon atoms which may be linked to silicon through the intermediacy of a C_2-C_6 linear or branched alkylene radical.

4. The tire as claimed in claim 2, wherein the polyorganosiloxane is formed by a linear, random, sequential or block copolymer, of the following formula (V):

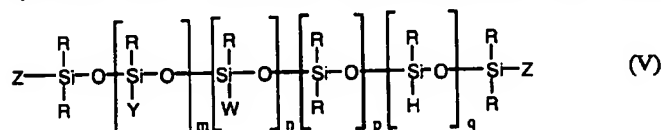

in which: the symbols Y, W and R are as defined in claim 2;

the symbol Z is a monovalent radical chosen from the radicals formed by hydrogen and from those corresponding to the definitions of R, Y and W;

the sum $m+n+p+q \geq 3$;

$0 \leq m \leq 100$;

$0 \leq n \leq 100$;

$0 \leq p \leq 20$; and

$0 \leq q \leq 40$;

with the conditions according to which:


if $m=0$, at least one of the substituents Z corresponds to a radical corresponding to the definition characterizing Y; and

if $m=n=0$ and $p+q \geq 1$, then at least one of the substituents Z corresponds to a radical corresponding to the definition characterizing Y.



5. The tire as claimed in claim 4, wherein $p=q=0$ and $0.5 \leq m/n \leq 5$ in formula (V).

6. The tire as claimed in claim 2, wherein the polyorganosiloxane consists of a cyclic copolymer of the following formula (VI):

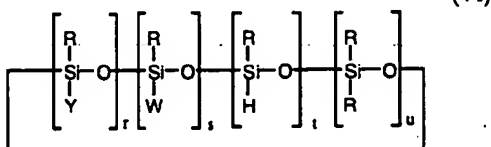

In which:

Y, W and R are as defined in claim 2, and with r, s, t and u representing positive whole or decimal numbers;

the sum $r+s+t+u \geq 3$;


$1 \leq r \leq 8$;

$1 \leq s \leq 8$;

$0 \leq t \leq 8$; and

$0 \leq u \leq 8$.

7. The tire as claimed in claim 1, wherein the functionalized organosilane is chosen from the compounds corresponding to the following formulae:

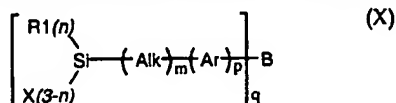

In which:

R1 denotes an alkyl group containing 1 to 10 carbon atoms, or a phenyl radical;

X denotes a hydrolyzable group chosen from:

the halogens,

alkoxy or cycloalkoxy radicals, and

acyloxy radicals,

wherein after hydrolysis, X may denote a hydroxyl group (OH);

$0 \leq n \leq 2$;



(Alk) denotes a divalent hydrocarbon group chosen from linear or branched alkyls containing from 1 to 10 carbon atoms;

m is 0 or 1;

(Ar) denotes a hydrocarbon group chosen from aryls, containing from 6 to 12 carbon atoms;




p is 0 or 1, with the condition that p and m are not both equal to 0;

q=1 or 2; and






B denotes a group capable of forming a bond with at least one of the elastomers of the rubber composition, wherein:






if q=2: B is a polysulfide functional group chosen from the following groups:

—S_x— with $1 \leq x \leq 8$, x being a positive integer,




if q = 1: B is a functional group chosen from the following groups:





(XI)

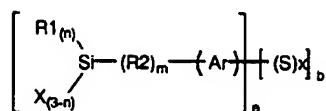

in which:

R1 and X correspond to the same definition as that given above as legend to formula (X);

$$0 \leq n \leq 2;$$

(R2) denotes a divalent hydrocarbon group chosen from linear or branched alkyls and alkylenoxys, containing from 1 to 10 carbon atoms;

m is 0 or 1;


(Ar) denotes a hydrocarbon group chosen from aryls, containing from 6 to 12 carbon atoms;

(S)x is a divalent polysulfured radical, each free valency being bonded directly to a carbon atom of an aromatic ring, it being possible for a number of aromatic rings to be linked together by the radical (S)x;

$$2 \leq x \leq 6; \text{ and}$$

$$a \geq 2 \text{ and } b \geq 1 \text{ with } 0.4 \leq a/b \leq 2;$$

(XII)



in which:

R1 and X correspond to the same definition as that given above as legend to formula (X);

$$0 \leq n \leq 2; \text{ and}$$



14. The tire as claimed in claim 1, wherein the diene-based polymer is a butadiene-styrene copolymer or a butadiene-styrene-isoprene copolymer or a polybutadiene or polyisoprene or natural rubber or a blend of two or more of these diene-based polymers.

15. The tire as claimed in claim 14, wherein the butadiene-styrene copolymer is a copolymer prepared in solution which has a styrene content of between 25 and 30% by weight, a content of vinyl bonds in the butadiene-based portion of between 55% and 65%, a trans 1,4 bond content of between 20% and 25% and a glass transition temperature of between -20°C . and -80°C .

16. The tire as claimed in claim 14, wherein the polybutadiene has more than 90% of cis 1,4 bonds.

17. A tire casing including a rubber composition including at least one diene elastomer, silica as reinforcing filler, and a covering additive, wherein the covering additive consists of at least one functionalized polyorganosiloxane compound containing, per molecule, at least one functional siloxy unit capable of bonding chemically and/or physically with the surface hydroxyl sites present on the silica particles.

18. A tire casing according to claim 17, wherein the functionalized polyorganosiloxane compound is chosen from the following compounds:

(A)— the compounds bearing, per molecule, a functional unit selected from the group consisting of

— α — at least one functional siloxy unit of formula:



In which:

$a = 0, 1 \text{ or } 2$;



R is a monovalent hydrocarbon radical chosen from linear or branched alkyls containing from 1 to 6 carbon atoms, or from aryls, the radicals R being identical or different when $a = 2$; and

Y is a C_1 - C_{15} linear or branched alkoxy radical;

— β — at least one functional siloxy unit of formula:



in which:

$b = 0, 1$ or 2 ;

R corresponds to the same definition as that given above for the substituent R of formula (I) and may be identical with or different from the latter; and

W is a monovalent hydrocarbon radical containing from 2 to 30 carbon atoms and constituting a functional residue bonded to silicon by an Si—C bond, this residue being chosen from the following groups:

- (i) a linear or branched alkyl group containing at least 7 carbon atoms;
- (ii) a linear or branched C_2 - C_{20} alkenyl group containing one or more double bonds in and/or at the end(s) of the chain(s); or
- (iii) a saturated or unsaturated aliphatic mono- or polycyclic group containing 5 to 20 carbon atoms and one or more ethylenic double bond(s) in the ring(s); and

— γ — at least one functional siloxy unit of the following formula:




in which

$c = 0, 1, 2$ or 3 , $d = 1$ and $c+d \leq 3$; and

the substituent R being as defined above in formulae (I) and (II);

(B)—the compounds of formula (IV):

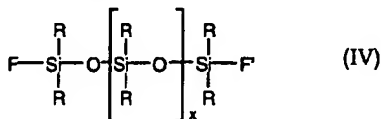

in which:

R is a hydrocarbon radical corresponding to the same definition as that of R given above as legend to formula (I), or a linear or branched C_2 - C_{20} alkenyl group



containing one or more double bonds; the various exemplars of R may be identical with or different from each other;

$x = 0$ to 500; and

F and F' are monovalent radicals chosen from hydrogen, the halogens, those corresponding to the definition of R, hydroxyl, alkoxy, enoxy, acyloxy, acetoxy, oxime and amine functional groups; F and F' may be different or identical, but in the latter case it must not be the radical R; and

(C)—polyorganosiloxane resins containing monovalent radicals and/or reactive functional groups F and F', these symbols having the same definition as that given above as legend to formula (IV).

19. The tire according to claim 7, wherein the organosilane is 3-mercaptopropyltri(C₁-C₆-alkoxy)silane or 3-mercaptopropyltrimethoxy- or -triethoxysilane.

20. The tire according to claim 7, wherein the organosilane is bis(triethoxysilylpropyl) tetrasulfide.

21. The tire as claimed in claim 2, wherein

(A) in formula (I): R is selected from the group consisting of methyl, ethyl, propyl, butyl, and phenyl; and Y is selected from the group consisting of C₁-C₆ alkoxys, methoxy, ethoxy and (iso)propoxy;

(B) in formula (II), W has one or more atoms selected from the group consisting of oxygen and sulfur; the C₂-C₂₀ alkenyl group includes one or more double bonds which are conjugated and/or associated with at least one activating group in the α position; and the aliphatic mono- or polycyclic group is bonded to silicon through the intermediacy of a C₂-C₁₀ linear or branched alkylene radical; and

(C) in formula (IV): $x = 0$ to 50; and F and F' are individually selected from the group consisting of chlorine, hydroxyl, methoxy, and ethoxy.



22. The tire as claimed in claim 3, wherein the substituent W of the formula (II) is selected from the group consisting of dodecyl, undecyl, tridecyl, hexynyl dodecenyl, cyclohexyl, cyclohexenyl, bicyclic rings originating from norbornene, and bicyclic rings originating from dicyclopentadiene.

23. The tire as claimed in claim 4, wherein one or more of the following definitions apply in formula (V):

(A) $3 \leq m+n+p+1 \leq 100$;

(B) $p=q=0$, $m \leq 1$, $n \leq 50$;

(C) $1 \leq m \leq 50$;

(D) $1 \leq n \leq 50$;

(E) $0 \leq p \leq 10$; and

(F) $0 \leq q \leq 10$.

24. The tire as claimed in claim 5, wherein $1 \leq m/n \leq 3$ in formula (V).

25. The tire as claimed in claim 6, wherein one or more of the following definitions apply in formula (VI):

(A) $3 \leq r+s+t+u \leq 8$;

(B) $t=u=0$;

(C) $1 \leq r \leq 4$;


(C) $1 \leq s \leq 4$;

(D) $0 \leq t \leq 4$; and

(E) $0 \leq u \leq 4$.

26. The tire as claimed in claim 7, wherein:

- (A) in formula (X): X is selected from the group consisting of chlorine and bromine; (Alk) is a divalent hydrocarbon group chosen from linear or branched alkyls containing from 1 to 6 carbon atoms; (Ar) denotes a hydrocarbon group chosen from aryls, containing from 6 to 8 carbon



atoms; and when B is —S—Z, Z is selected from the group consisting of chloride, bromide, amine and amide;

- (B) In formula (XI): R1 is a divalent hydrocarbon group chosen from C₂ to C₆ linear or branched alkyls and C₁ to C₆ linear or branched alkylenoxys; and
- (C) in formula (XII): Alkenyl denotes a C₂ to C₆ linear or branched hydrocarbon, cyclic or otherwise, containing one or more double bonds.

27. The tire according to claim 1, wherein the tire includes a tread, and the tread includes said rubber composition.

28. The tire according to claim 2, wherein the tire includes a tread, and the tread includes said rubber composition.

29. The tire according to claim 3, wherein the tire includes a tread, and the tread includes said rubber composition.

30. The tire according to claim 4, wherein the tire includes a tread, and the tread includes said rubber composition.

DATED this 12th day of January, 2001.

COMPAGNIE GENERALE DES ETABLISSEMENTS

MICHELIN - MICHELIN & CIE


WATERMARK PATENT & TRADEMARK ATTORNEYS
290 BURWOOD ROAD
HAWTHORN VICTORIA 3122
AUSTRALIA

SKP:DHS:JL P3179AU00




1/4

FIGURE N°1

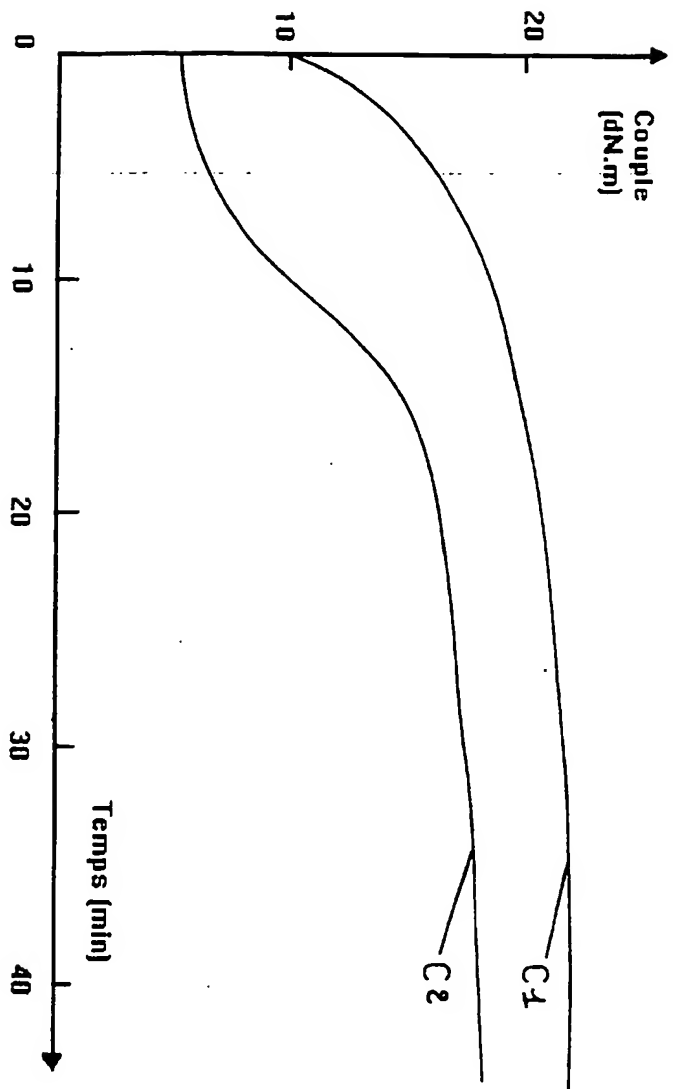

20001 16 10 6

FIGURE N°2

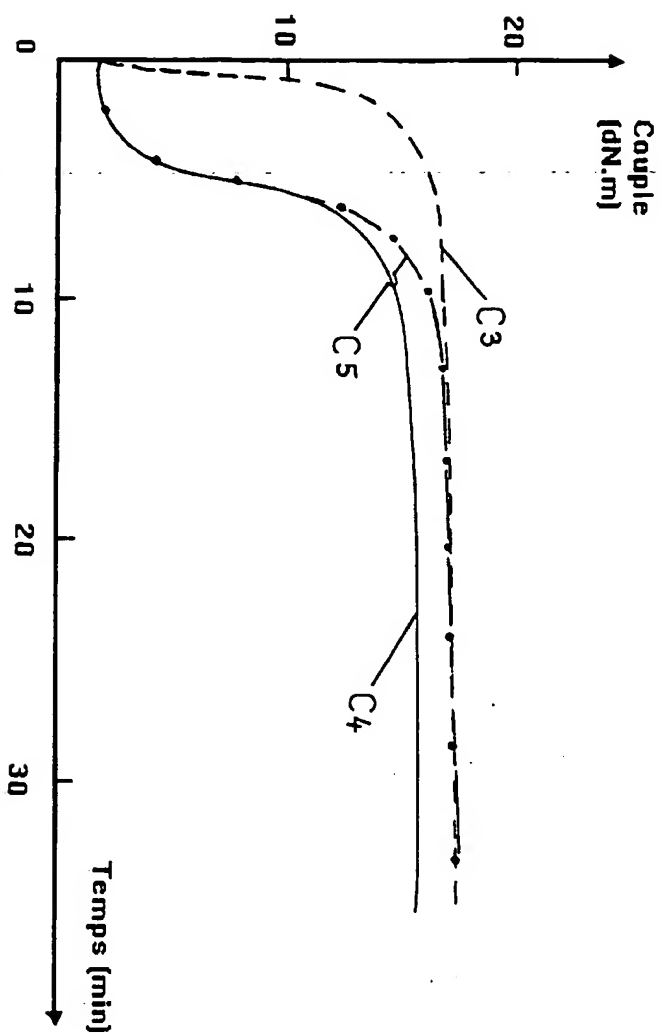

200001 15 10 0

3/4


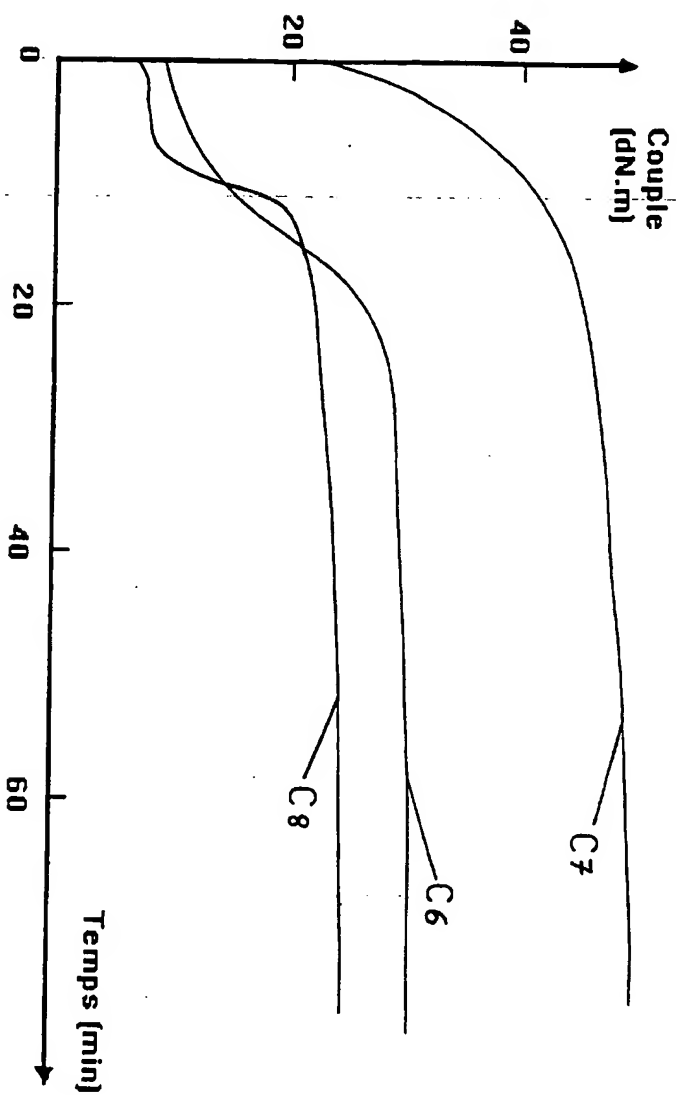


FIGURE N°3

00001 46 10 0

FIGURE Nº4

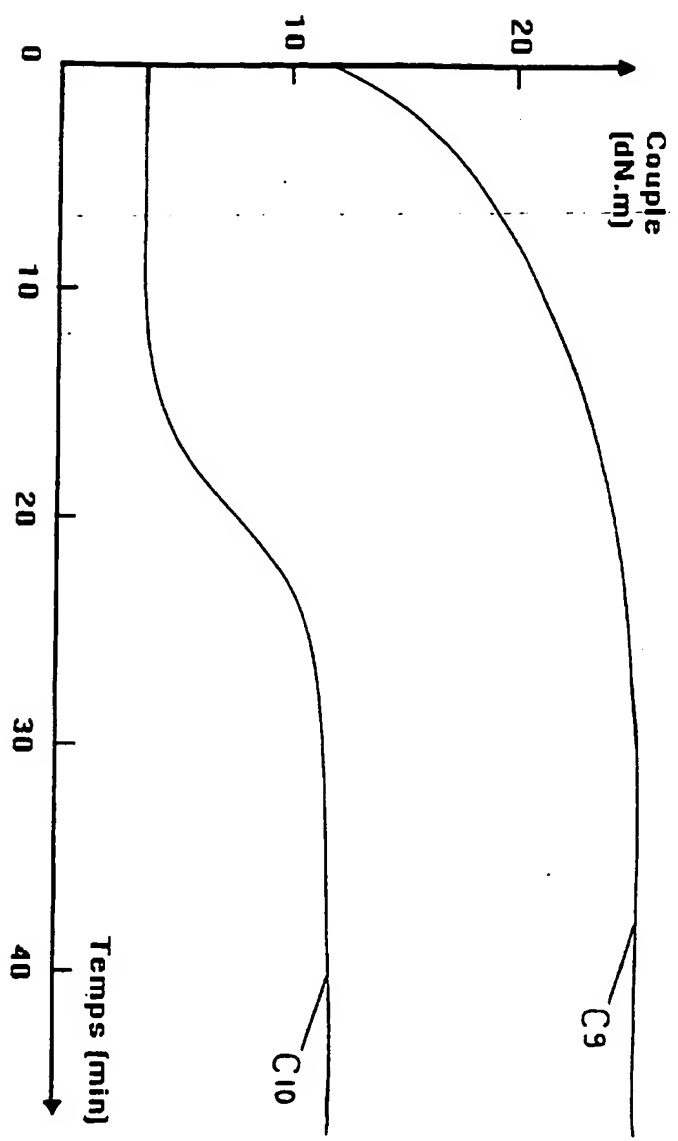

00001 16 10 6